
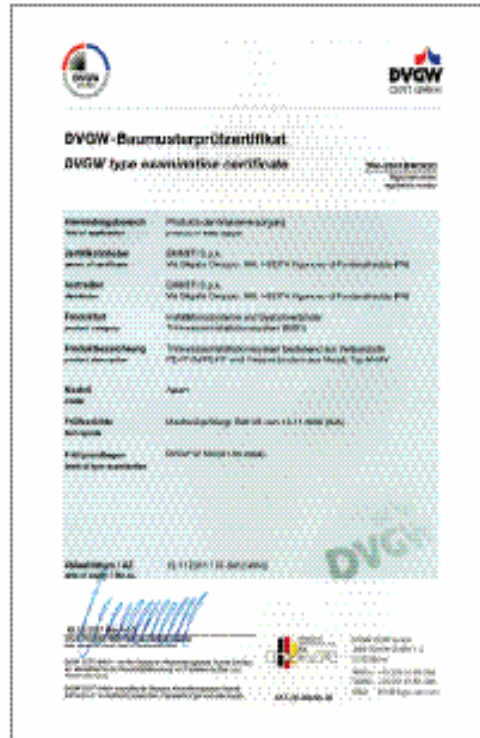


Emmeti Gerpex.

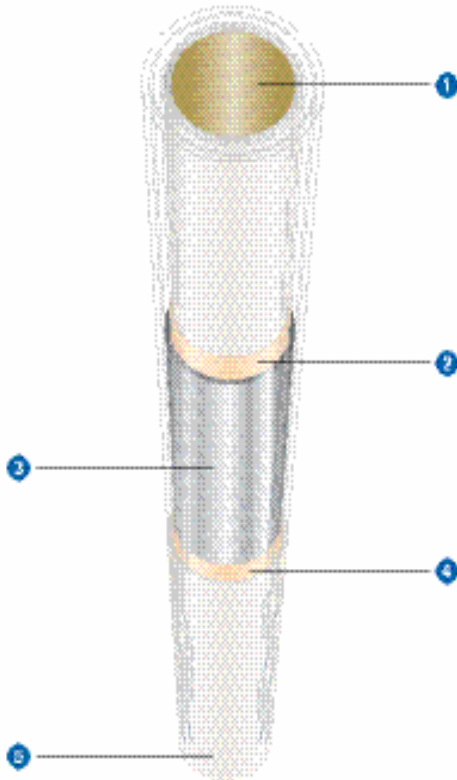

Technical Information.

1. Cross-linked Polyethylene inner pipe(PE-Xb/PE-X).
2. An adhesive layer bonding the inner pipe to the aluminum oxygen barrier.
3. Butt-welded aluminum oxygen barrier layer.
4. An adhesive layer bonding the outer pipe to the aluminum oxygen barrier.
5. Cross-linked Polyethylene outer pipe.

Max. working pressure: 95 Degrees Celsius with short term over load of 110 Degrees Celsius

Max. working pressure: 10bar.

Coefficient of linear expansion: 0.026 mm/m degrees Celsius.

Minimum radius of bending: 5 X Diameter of Pipe.

Suitable for Heating, Plumbing and Underfloor Heating for Domestic, Commercial & Industrial.